


## EXPULSOR DE MUELLE EMB SPRING PLUNGER EMB

Material:

Cuerpo: Acero de decoletaje, pavonado / Body: Blued steel for casting

Vástago: Acero para rodamientos, templado / Rod: tempered steel for casting

STOCK

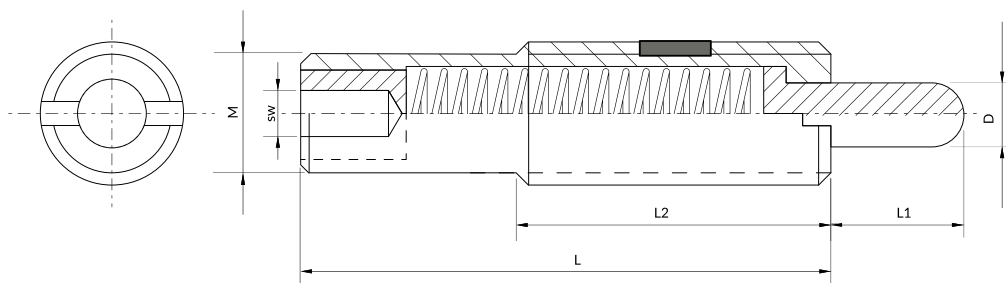

M	L	L1	L2	D	sw	Spring Pressure daN		Duty
						Min.	Max.	
M12	43	10	35	5,5	4	0,7	4	HEAVY (H)
M16	60	10	35	8	5	2,7	8	
M16	60	15	35	8	5	1,5	8	
M16	85	20	35	8	5	1,7	8	
M16	125	30	35	8	5	2	8	
M16	155	50	35	8	5	3	10	
M24	60	15	45	10	8	4	20	LIGHT (L)
M30	70	20	45	15	12	5	30	
M12	43	10	35	5,5	5	0,4	2	
M16	60	10	35	8	5	1,3	4	
M16	60	15	35	8	5	1	4	
M16	60	20	35	8	5	1,3	4	
M16	125	30	35	8	5	1,8	4	
M16	155	50	35	8	5	2	5	
M24	60	15	45	10	8	2	10	
M30	70	20	45	15	12	3	15	

How to order: EMB + M + L1+ Duty