


PERNO DE PRESIÓN CON MUELLE EMF
SPRING PLUNGER EMF

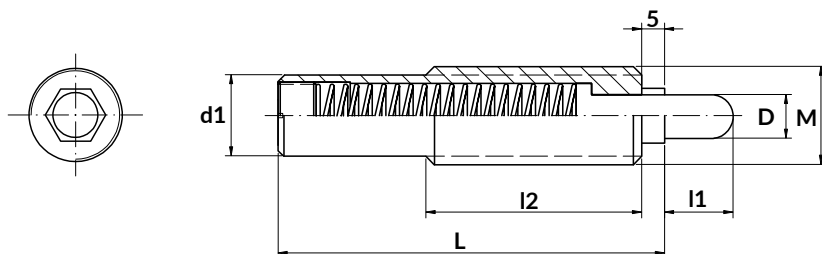

M	L	l1	l2	D	d1	Spring Pressure daN		Duty				
						Min.	Max					
	60	10				0,38	1,33					
	60	15				1	4					
	80	20				0,69	3,45					
	80	30				0,65	4,55					
	120	30				35	6		13,4	1,8	4	L
	150	40								1,32	3,72	
	150	50								1,32	4,32	
	150	60								1,32	4,92	
	200	70								0,97	4,05	
	M16x2	200				80					0,97	4,48
60		10	13	14,5								
60		15	15	56								
80		20	34,5	172,2								
120		30	20	80								
150		30	35	6	13,4	56,1		132,6			H	
150		40				56,1		158,1				
200		50				19,3		99,9				
200		60				19,3		116,1				
200		70				19,3		135,1				
	200	80				25	100,1					
	80	20				35	5		13,4	15,1	75,6	M

How to order: EMW + M + L + l1 + Duty