


PERNO DE PRESIÓN CON MUELLE EMW SPRING PLUNGER EMW

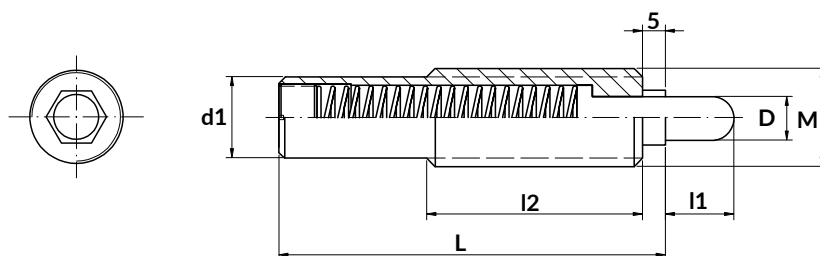

M	L	l1	l2	D	d1	Spring Pressure daN		Duty	
						Min.	Max		
M16x1,5	60	10				0,38	1,33		
	60	15				1	4		
	80	20				0,69	3,45		
	80	30				0,65	4,55		
	120	30				1,8	4		
	150	40		35	6	13,4	1,32	3,72	L
	150	50					1,32	4,32	
	150	60					1,32	4,92	
	200	70					0,97	4,05	
	200	80					0,97	4,48	
	60	10					13	14,5	
	60	15					15	56	
80	20					34,5	172,2		
120	30					20	80		
150	30					56,1	132,6		
150	40		35	6	13,4	56,1	158,1	H	
200	50					19,3	99,9		
200	60					19,3	116,1		
200	70					19,3	135,1		
200	80					25	100,1		
80	20		35	5	13,4	15,1	75,6	M	

How to order: EMW + M + L + l1 + Duty