

POSICIONADOR CON MUELLE Y RANURA PVD

SPRING PLUNGER WITH SPRING LOADED PIN AND SLOT PVD


Material:

Cuerpo: Acero de decoletaje, pavonado / Sleeve: Blued steel for casting

Perno: Acero de decoletaje, pavonado / Pin: Blued steel for casting

Muelle: Acero Inoxidable / Spring: Stainless Steel

STOCK

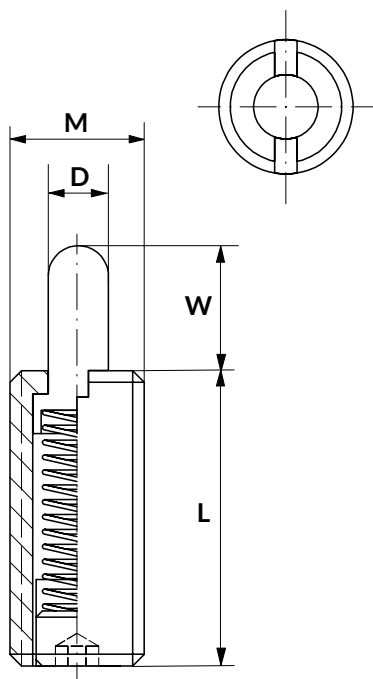

M	D	L	W	SW	Spring Pressure daN	
					Min.	Max
M3	1	12	1	0,7	0,2	0,4
M4	1,5	15	1,5	1,3	0,45	1,6
M5	2,4	18	2,3	1,5	0,6	1,9
M6	2,7	20	2,5	2	0,6	1,9
M8	3,5	22	3	2,5	0,1	3,9
M10	4	22	3	3	0,1	3,9
M12	6	28	4	4	1,2	5,3
M16	7,5	32	5	5	4,5	10
M20	10	40	7	6	5,2	12,5
M24	12	52	10	8	7	17

How to order: PVD + M